




## **SPECIFICATIONS**

Size	Metric	British
Max. Working Height <b>A</b>	12.00m	39ft 4in
Max. Platform Height <b>B</b>	10.00m	32ft 10in
Overall Length(Without Outriggers)	3.19m	10ft 6in
Overall Length(With Outriggers)	3.84m	12ft 7in
Overall Width <b>()</b>	1.77m	5ft 10in
Overall Height(Rails Up)	2.59m	8ft 6in
Overall Height(Rails Down)	1.82m	6ft
Platform Size(Length×Width)	2.88m×1.52m	9ft 5in × 5ft
Platform Extension Size <b>©</b>	1.43m	4ft 8in
Ground Clearance	0.24m	9in
Wheelbase <b>(1)</b>	2.29m	7ft 6in
Turning Radius(Inside/Outside)	2.15m/4.85m	7ft 1in/15ft 11in
Tyres	26×12-16.5	26×12-16.5

Performance		
S.W.L	454kg	1000lb
S.W.L On Extension	136kg	299lb
Max. Occupants (Indoor/Outdoor)	4/2	4/2
Gradeability	40%	40%
Travel Speed(Stowed)	6.00km/h	3.73mph
Travel Speed(Raised)	0.45km/h	0.28mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	40/46sec	40/46sec

Weight		
Overall Weight	4880kg	10758lb

Power		
Hydraulic Tank	71L	18.7gal
Battery	48V/320Ah	48V/320Ah
Charger	48V/35A	48V/35A
Driving Motor	4×32VAC/2kW	4×32VAC/2kW
Lifting Motor	48VDC/3.8kW	48VDC/3.8kW

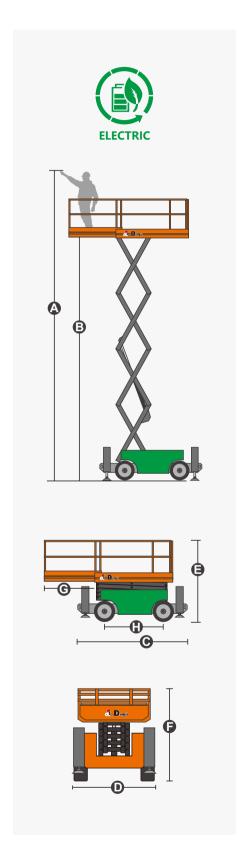







## **FEATURES**

## Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Two-Wheel Steering
- Automatic Braking System
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- · Lanyard Attachment Point
- Standard Transport Forklift Pockets
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Stop Button
- Platform Load Sense System
- · Drivable At Full Height
- Oscillating Axle Chassis



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











