

Specifikationer

GS-2669RT

| | |
|-----------------------------------|--------|
| Maximal höjd, under arbete | 9,8 m |
| Plattformens maximala höjd | 8 m |
| Maximal höjd, nedsänkt, räcke upp | 2,59 m |
| Maximal höjd, nedsänkt, räcke ned | 1,92 m |
| Höjd, skyddsräcken | 1,47 m |
| Bredd | 1,75 m |

Längd, modeller utan stödben

| | |
|-------------------------|--------|
| Plattform indragen | 3,12 m |
| Plattform utfälld | 4,51 m |
| Yttre plattform utfälld | 4,32 m |

Längd, modeller med stödben

| | |
|-------------------------|--------|
| Plattform indragen | 3,76 m |
| Plattform utfälld | 4,81 m |
| Yttre plattform utfälld | 4,32 m |
| Maximal lastkapacitet | 680 kg |

| | |
|--------------------|----------|
| Maximal vindstyrka | |
| Inomhus | 0 m/s |
| Utomhus | 12,5 m/s |

| | |
|-------------------|--------|
| Hjulbas | 2,29 m |
| Vändradie (yttre) | 4,6 m |
| Vändradie (inre) | 2,11 m |
| Markfrigång | 24 cm |

| | |
|-------------|----------|
| Vikt | 3 309 kg |
|-------------|----------|

(Maskinvikten varierar med olika tillval. Information om maskinens vikt finns på etiketten med serienumret.)

| | |
|--------------------------------------|----------------|
| Reglage | Proportionella |
| Växelströmsuttag (AC) på plattformen | Standard |

Plattformens mått

| | |
|------------------------------|--------------|
| Plattformens längd x bredd | 2,79 x 1,6 m |
| Plattformens längd utskjuten | 2,67 m |

Körhastigheter

| | |
|----------------------------|----------------------------|
| Nedsänkt, maximal | 5,63 km/h |
| Plattform upphöjd, maximal | 0,48 km/h 12,2 m/90 sek |

| | |
|------------------------------------|-------------------|
| Maximalt hydraultryck (funktioner) | 241 bar |
| Däckstorlek | 26 x 12 x 380 tum |

Bullernivå

| | |
|-------------------------------|---------|
| Ljudtrycksnivå på marken | <85 dBA |
| Garanterad ljudeffektnivå | 105 dBA |
| Ljudtrycksnivå på plattformen | <79 dBA |

Totala vibrationsvärdet som hand-/armsystemet utsätts för överstiger inte 2,5 m/s².

Högsta kvadratiska medelvärdet av den viktade acceleration som hela stommen utsätts för överstiger inte 0,5 m/s².

| | |
|---|-----------|
| Maximal lutningskapacitet, nedsänkt läge | 40% (22°) |
|---|-----------|

| | |
|---|-----------|
| Maximal sidolutningskapacitet, nedsänkt läge | 40% (22°) |
|---|-----------|

Observera: Lutningskapaciteten påverkas av markförhållanden och dragkraft.

Information om golvbelastning

| | |
|-----------------------|------------------------------------|
| Maximal däcklast | 1 332 kg |
| Stödbenslast, maximal | 1 332 kg |
| Ringtryck | 5,14 kg/cm ² 504 kPa |
| Stöbdenstryck | 2,63 kg/cm ² 258 kPa |
| Upptaget golvtryck | 860 kg/m ² 8,43 kPa |



Observera: Denna golvlastinformation är ungefärlig och omfattar inte olika tillvalskonfigurationer. Du måste alltid iaktta alla säkerhetsfaktorer i samband med användningen.

Genie har som policy att kontinuerligt förbättra sina produkter. Produktspecifikationerna kan ändras utan föregående meddelande.

Self-Propelled Scissor Lifts

GS™ -2669 RT, GS-3369 RT, GS-4069 RT

Specifications

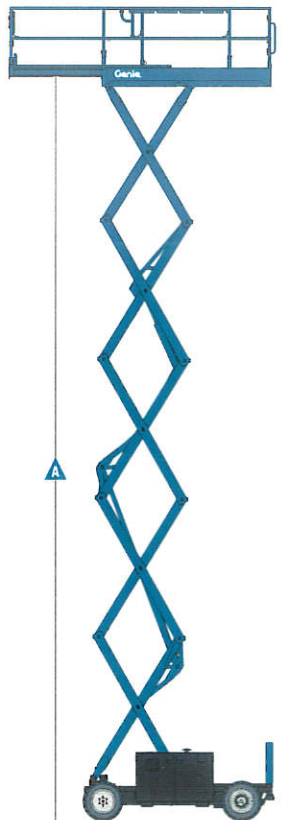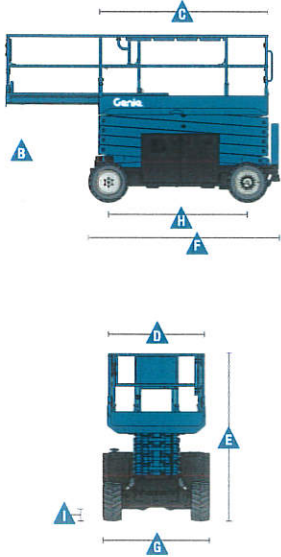

| Models | GS-2669 RT | | GS-3369 RT | | GS-4069 RT | |
|---------------------------------------|-------------|--------|-------------|--------|------------|--------|
| Measurements | US | Metric | US | Metric | US | Metric |
| Working height maximum ¹ | 32 ft | 10 m | 39 ft | 11.9 m | 46 ft | 14.3 m |
| A Platform height maximum | 26 ft 2 in | 8.0 m | 32 ft 8 in | 9.96 m | 40 ft 3 in | 12.3 m |
| B Platform height - stowed | 4 ft 10 in | 1.47 m | 4 ft 10 in | 1.47 m | 5 ft 5 in | 1.65 m |
| C Platform length - outside | 9 ft 2 in | 2.79 m | 9 ft 2 in | 2.79 m | 9 ft 2 in | 2.79 m |
| extended | 14 ft 2 in | 4.32 m | 14 ft 2 in | 4.32 m | 14 ft 2 in | 4.32 m |
| Slide-out platform extension deck | 5 ft | 1.52 m | 5 ft | 1.52 m | 5 ft | 1.52 m |
| A Platform width - outside | 5 ft 3 in | 1.6 m | 5 ft 3 in | 1.6 m | 5 ft 3 in | 1.6 m |
| Toeboard height | 6 in | 0.15 m | 6 in | 0.15 m | 6 in | 0.15 m |
| E Height - stowed ² | 8 ft 6 in | 2.59 m | 8 ft 6 in | 2.59 m | 9 ft | 2.74 m |
| rails lowered | 6 ft 3.5 in | 1.92 m | 6 ft 3.5 in | 1.92 m | 6 ft 10 in | 2.08 m |
| E Length - stowed | 10 ft 3 in | 3.12 m | 10 ft 3 in | 3.12 m | 10 ft 3 in | 3.12 m |
| platform extended | 14 ft 9 in | 4.5 m | 14 ft 9 in | 4.5 m | 14 ft 9 in | 4.5 m |
| with outriggers | 12 ft 4 in | 3.76 m | 12 ft 4 in | 3.76 m | 12 ft 4 in | 3.76 m |
| G Width | 5 ft 9 in | 1.75 m | 5 ft 9 in | 1.75 m | 5 ft 9 in | 1.75 m |
| H Wheelbase | 7 ft 6 in | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in | 2.29 m |
| A Ground clearance - center | 9.5 in | 0.24 m | 9.5 in | 0.24 m | 9.5 in | 0.24 m |

Productivity

| | | | | | | |
|------------------------------------|--------------|------------|-------------|------------|-------------|------------|
| Maximum platform occupancy | 4 | | 4 | | 3 | |
| Lift capacity | 1,500 lbs | 680 kg | 1,000 lbs | 454 kg | 800 lbs | 363 kg |
| Extension deck capacity | 300 lbs | 136 kg | 300 lbs | 136 kg | 300 lbs | 136 kg |
| Drive height | full height | | full height | | full height | |
| Drive speed - stowed | 3.5 mph | 5.6 km/h | 3.5 mph | 5.6 km/h | 3.5 mph | 5.6 km/h |
| Drive speed - raised | 0.3 mph | 0.5 km/h | 0.3 mph | 0.5 km/h | 0.3 mph | 0.5 km/h |
| Gradeability - stowed ³ | 40% | | 35% | | 35% | |
| Maximum outrigger leveling: | | | | | | |
| front/back uphill | 5.3° / 4.2° | | | | | |
| side to side | 11.7° | | | | | |
| Turning radius - inside | 83 in | 2.11 m | 83 in | 2.11 m | 83 in | 2.11 m |
| Turning radius - outside | 181.2 in | 4.6 m | 181.2 in | 4.6 m | 181.2 in | 4.6 m |
| Raise/lower speed | 34 / 31 sec | | 39 / 29 sec | | 61 / 28 sec | |
| Controls | proportional | | | | | |
| Drive | four wheel | | | | | |
| Tires - rough terrain | 12 x 26 in | 30 x 66 cm | 12 x 26 in | 30 x 66 cm | 12 x 26 in | 30 x 66 cm |

Power

| | | | | | | |
|---------------------------|--|--------|--------|--------|--------|--------|
| Power source | PSI (GM) .998L gas/LPG Kubota D-1105 Tier 4f diesel 24.8 hp | | | | | |
| Fuel tank capacity | 10 gal | 37.9 L | 10 gal | 37.9 L | 10 gal | 37.9 L |
| Hydraulic system capacity | 18 gal | 68.1 L | 18 gal | 68.1 L | 18 gal | 68.1 L |

Weight⁴ / Floor Loading⁵

| | | | | | | |
|-------------------------|-----------|----------|-----------|----------|------------|-----------|
| Weight - ANSI, CSA | 7,295 lbs | 3,309 kg | 7,895 lbs | 3,490 kg | 10,245 lbs | 4,647 kg |
| - with outriggers | 8,160 lbs | 4,066 kg | 8,560 lbs | 3,882 kg | 11,110 lbs | 5,039 kg |
| Tire load, maximum | 2,891 lb | 1,311 kg | 3,058 lb | 1,387 kg | 3,816 lb | 1,731 kg |
| Tire contact pressure | 71.9 psi | 496 kPa | 76.1 ps | 524 kPa | 94.9 psi | 654 kPa |
| Occupied floor pressure | 173 psf | 8.3 kPa | 172 psf | 8.22 kPa | 214 psf | 10.25 kPa |

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

¹ The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

² Based on RT tires, deduct 2 in (5.8 cm) for turf and non-marking tires.

³ Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine.

See operator's manual for details regarding slope ratings.

⁴ Weight varies depending on options and country standards.

⁵ Note: Floor loading information is approximate and does not incorporate different option configurations.

It should be used only with adequate safety factors.